

MONUMENT RECORD

Corner ID: **Polk_U17**

Section Corner

Sections 23, 24, 25 & 26- T07N-R01E, 2nd P.M.



Polk Township, Monroe County, Indiana

Section 23 T07N-R01E	Section 24 T07N-R01E
Section 26 T07N-R01E	Section 25 T07N-R01E

MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

(#101) 0.5' north-south X 0.4' east-west limestone with the numbers 23 24 25 26 engraved on top found 0.3' above ground, 32' Southeast of Southeast edge of a stone road.

MONUMENT LOCATION SKETCH:

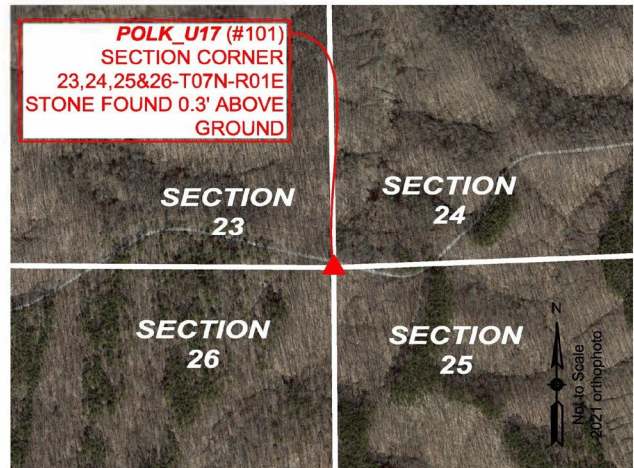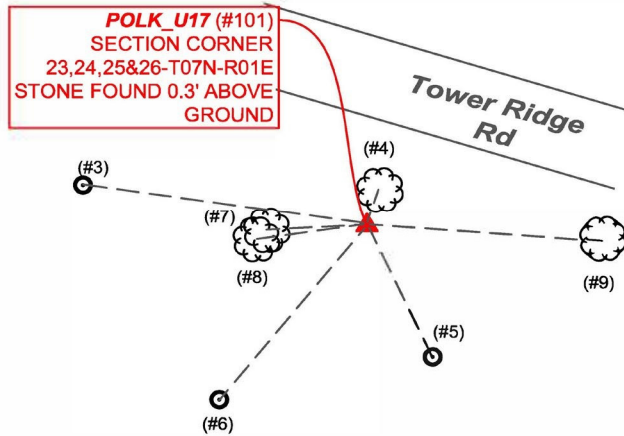

WITNESS MONUMENT TIES: Describe at least three new BT's (Bearing Trees) and/or witness objects established or work done to preserve existing evidence. BT diameters are noted as dbh (diameter at breast height) and are measured approximately 4.5' above ground, unless noted otherwise. Bearings and Distances are measured from the monument to the center of the BT. Bearings and Distances to witness ties were measured with a Sokkia Set 510 Total Station.

ID	Bearing	Distance	Description
(#4)	N19° 01'E	8.3'	18" diameter (at base) twin Sugar Maple tree with survey marker sign attached
(#8)	S51° 01'W	29.4'	16" diameter Persimmon tree
(#7)	S47° 34'W	30.6'	Medal detector reading (believed to be mag nail) in South root of 16" diameter Sugar Maple tree

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument. Witnesses noted as a Rebar Lite are a 5/8" diameter by 16" polycarbonate rod with a 1-1/2" mag nail in top and yellow plastic cap stamped "MONROE COUNTY WITNESS POINT" set 0.1 foot below grade unless otherwise noted.

Note: Though we collected multiple fixed shots on the stone, we were unable to collect a fixed shot on a rebar lite, therefore their geodetic coordinates are unknown. Data shown hereon is relative to a compass bearing and a EDM shot distance from the stone to the rebar lite at #3, with all other rebar lites locations being relative to said compass bearing.

(#3)	N82°W (Compass)	64.33'	Rebar Lite
(#5)	S25° 48' 55"E	33.38'	Rebar Lite
(#6)	S39° 07' 35"W	52.04'	Rebar Lite



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Polk_U17**

Section Corner

Sections 23, 24, 25 & 26- T07N-R01E, 2nd P.M.

Polk Township, Monroe County, Indiana

Section 23 T07N-R01E	Section 24 T07N-R01E
Section 26 T07N-R01E	Section 25 T07N-R01E

PHOTO IDENTIFIED: *Photo Date:* 06/21/2024



Photo Orientation & Description: From above



Photo Orientation & Description: From East looking West

EXISTING SURVEY HISTORY *Include as much detail and history of the corner as known at the time of perpetuation*

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 1814 *By:* Arthur Henrie Deputy Surveyor

Where filed or recorded: Monroe County original notes, page 280

Original monument: Post

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Hickory	5"	N66°W	15 Links
Hickory	15"	S70°E	33 Links

Notes:

SUBSEQUENT CORNER RESTORATION:

None Found

OTHER SURVEY HISTORY: *Include details such as surveyor name, date, recording info, monument description, etc.*

None Found

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: February 3, 2012. *By:* Kevin Enright, Jason Mintl *Monument Found:* Stone *BTs or Reference Objects Found:*

Project #: Polk U-17 *Field Book:* 46, page 22 *Notes:*

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 06/21/2024 *By:* MES/WEP *Monument Found:* Engraved stone *BTs or Reference Objects Found:* References from 2012 visit found and new references made. *Project #:* 24-003 *Field Book:* 56, page 65. *Notes:*

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

The stone was found to be ±32' Southeast of the Southeast edge of stone of Tower Ridge Road, on a wooded Ridge top.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

GPS coordinates were established on the stone, 3 rebar lites were set within sight of the stone that could be used to reestablish its position should it become obliterated. Additionally, tree references were made to act as visual references to finding it.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 2 of 3

MONUMENT RECORD

Corner ID: **Polk_U17**

Section Corner

Sections 23, 24, 25 & 26- T07N-R01E, 2nd P.M.

Polk Township, Monroe County, Indiana

Section 23 T07N-R01E	Section 24 T07N-R01E
Section 26 T07N-R01E	Section 25 T07N-R01E

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The stone was found. Based on its engraving and location relative to topographic maps, it is, in my opinion, the most reliable evidence of the original location of the Southeast corner of Section 23, Southwest corner Section 24, Northwest corner Section 25 and Northeast corner of Section 26, all in Township 7 North, Range 1 East, with negligible uncertainty.

GEODETIC COORDINATES: *Northing:* 1374474.0' *Easting:* 3155682.8'.

BASIS OF GEODETIC COORDINATES:

The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover and/or with a Sokkia Set 510 Total Station radially from points located with GPS. Distances obtained with GPS have not been adjusted to ground. To adjust grid distances to ground distances multiply them by a scale factor of 1.000013756.

CERTIFICATIONS:



Date: 09/16/2025

Trohn Enright-Randolph

Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review
Board on

09/16/25



MONUMENT RECORD
State of Indiana - County of Monroe

Section: 24

Township: 7 North


Range: 1 East

Corner ID: Polk U-17

Monument Description & Remarks: Limestone with "X", length 0.50ft, width 0.40ft, height 0.30ft. Survey Sign 4ft above ground at point C

References On File: H. Deaton land corner record, H.N.F. Index No. R-21 (1974), on file in Surveyor Office


RECOVERY TIE DRAWING
Field Book 46 Page No. 22

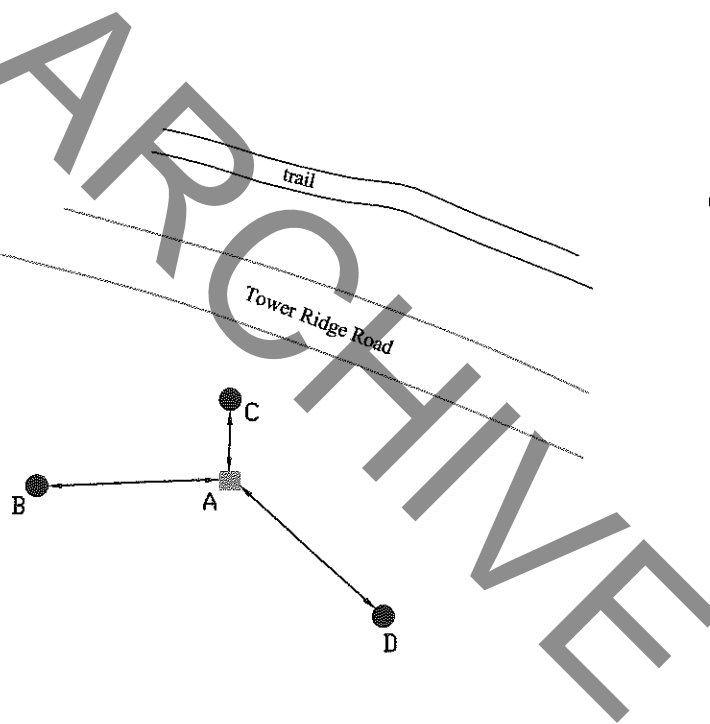

- A - Limestone with "X"
- B - S 89° W 22.14' to MAG
nail in 14" Sugar Maple
- C - N 07° E 7.85' to Survey Sign
on 10" bifurcated Sugar Maple
- D - S 38° E 24.82' to MAG
nail in 18" White Ash Tree

Not To Scale
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 3rd day of February 2012.




Administered by the Monroe County Surveyor Review Board

Date: 4-10-2012

T. 2N R. 1E Mer. N.F. Hoover County Monroe State La.
Section 23 Corner common to sections 23, 24, 25 and 26

EXISTING SURVEYS

Original Government Survey	Original Evidence Found
Year surveyed <u>1973</u>	Year of search <u>1973</u> By <u>H. Denton</u>
Original monument <u>Wood post</u> (Wood post, stone, pile of stones, pipe, etc.)	Monument found <u>NO</u>
Bearing Trees	Original Bearing Trees Found
Species <u>1 cypress 1 pine</u>	Species _____
Diameter <u>5"</u>	Diameter _____
Bearing <u>N 60° E 20'</u>	Bearing <u>NONE</u>
Distance <u>25'</u>	Distance _____
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____	Year of search <u>1974</u> By <u>D. Munter - Henry Denton</u>
Where filed or recorded _____	Found <u>limestone 6" square 4" out of ground</u>
Monument _____ (Original, concrete post, iron rod, etc.)	<u>marked</u>
	<u>23 24</u>
	<u>26 25</u>
	<u>Stone is 12' W of 18" W.O. & 32' S of E.R.D.</u>
Bearing Trees, Reference Objects	Bearing Trees, Reference Objects
Species _____	_____
Diameter _____	_____
Bearing _____	_____
Distance _____	_____



Sketch

○ Corner ▨ F.S. Land

At time of search:

1. Did you have the record description?
Yes ☒ No ☐2. How was search area located?
Pacing, chaining, photos, maps,
etc. _____3. Man hours spent in search 1 hr.4. Do you think additional search might
recover evidence? Yes ☐ No ☒5. Signature H. Denton

Relation of Evidence to Record Features Along Section Lines

Section line to sections	Object	Record distance	Measured distance
_____	_____	_____	_____
_____	_____	_____	_____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any.

Perpetuation Record

Monument and accessories established. Include brief description of area.

_____Certified corner restoration certificate prepared: Yes ☐ No ☐

Filed in county records at _____ Date _____ County Document No. _____


Identified on aerial photo No. _____ Which is filed at _____

LAND CORNER RECORD

5680-2

1. T 7N R 1E No. R-21 Cor. NE Mer. _____ State Ind. N. F. HOOSIER Dist. B'ham.

2. Corner Status FR 1575



3. Original Description _____ Vol. _____ Page _____ Where Recorded _____

4. Description of Corners:
6" square limestone w/ cross approx 4" above ground
23' south of center line of FR 1575. MAY be
Witness trees nearby but should be checked.

5. Investigation Notes:

7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

6. Signed J.M. Title D.R. Date 3-20-67

PERPETUATION RECORD

10. Monument:

11. Accessories

12. Set By _____ Title _____

License _____ Agency _____ Date _____

Field Book _____ Page _____

13. Recorded By _____ Volume _____ Page _____

(Agency)

(Date) (City) (County) (State)

14. Remarks: